


Visual Signals FLASHING FILAMENT



BEACONS

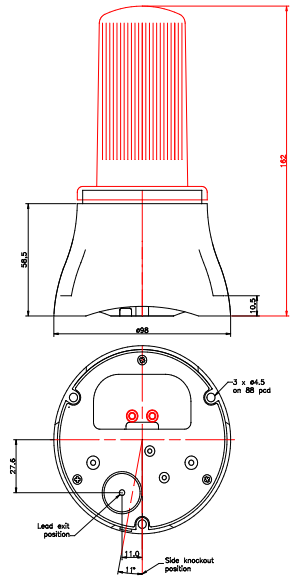

Industrial Flashing Filament Beacons > FF125 DIN Base Series

Product overview

Suitable for Security & Light Industrial applications for local signalling purposes.

Cable termination is inside the enclosure.

The FF125 Din operates through an internal timing circuit that cycles the lamp On & Off.

FEATURES

IP65

Continuously rated

Suitable for surface mounting

Optional protective guard available - see accessory page

360° visibility

MATERIAL

UV Stable Polycarbonate Lens

UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
FF125-90	12v Dc ---	Ba15d x 21w	1.75 A
FF125-91	24v Dc ---	Ba15d x 21w	0.88 A
FF125-92	115v Ac ~	Ba15d x 15w	0.13 A
FF125-93	230v Ac ~	Ba15d x 15w	0.07 A



Kg025

50/60 Hz

°C -25 + 55

IP 65

FPM60

INDUSTRIAL

APPROVAL AND CONFORMITIES

