

Visual Signals LIGHT EMITTING DIODE BEACONS




Industrial LED Multi Functional Beacons > LEDD & LEDA 125 Series

Product overview

Suitable for fire, security & industrial applications, these beacons offer three alternative light mode operations: 1 - Continuously ON, 2 - Rapid Flash 120 FPM or 3 - Standard Flash 60 FPM, selected by a dip switch mounted lens side on the PCB. The LEDA version

incorporates two Piezo sounders situated in the base and are synchronised to the light mode. 'Ac' units are supplied with one meter of flying lead. 'Dc' units allow for termination inside the base enclosure. An M12 sealing gromet in the base allows for cable entry. Piezo's cannot be controlled independently from light.

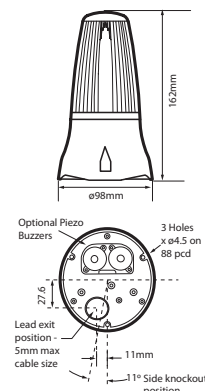

Features

- LED long life
- Continuously rated
- Extra bright
- Combined audible & visual signal
- Cage guard option - see accessory page
- 360° visibility
- 3 point fix
- IP65

Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:			
			01	02	03	04
LEDD125-02	24v Dc ---	48 LEDs	450 mA	250 mA	250 mA	250 mA
LEDD125-03	115v Ac ~	48 LEDs	155 mA	130 mA	130 mA	130 mA
LEDD125-04	230v Ac ~	48 LEDs	90 mA	80 mA	80 mA	80 mA

For Audible Option

LEDA125-02	24v Dc ---	48 LEDs	450 mA	250 mA	250 mA	250 mA
LEDA125-03	115v Ac ~	48 LEDs	155 mA	130 mA	130 mA	130 mA
LEDA125-04	230v Ac ~	48 LEDs	90 mA	80 mA	80 mA	80 mA



Kg 0.57 Ac
0.33 Dc

50/60 **Hz**

°C -20+45

IP 65

FPM 60/120

dB 90

APPROVED AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO THE PRODUCT WHEN ORDERING

01 02 03 04 05

INDUSTRIAL

FIRE