




# Visual Signals ROTATING BEACONS

## Industrial Rotating Beacons > R401/400 Series

### Product overview

The R401/400 DIN Base Series uses a parabolic reflector which, driven by an electric motor, revolves around a continuously illuminated lamp on the vertical axis of the beacon creating a powerful beam of light travelling

through 360 degrees. Generally, this type of beacon has greater degree of light output than other models but this is off-set by the fact that the parabolic reflector only illuminates one given point at a time. The 401/400 Series incorporates both bottom and side entry cabling access and mounting is achieved via external three point fixing.

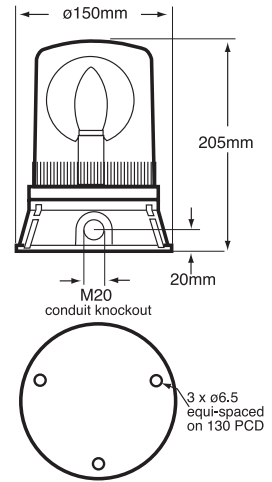

### Features

- Continuously rated
- Suitable for surface or wall mounting
- Optional wall bracket & protection guard available - see accessory page
- Twin belt drive system
- Optional M20 side-entry conduit knockout
- IP65

### Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Mounting Base

Code No:	Voltage:	Light Source:	Current:
R401-13	12v Dc ---	H1 x 55w	4.70 A
R401-14	24v Dc ---	H1 x 70w	3.00 A
R401-29 •	24v Dc ---	Ba15s x 10w	0.60 A
R401-60	12v Dc ---	Ba15d x 21w	1.85 A
R401-61 •	24v Dc ---	Ba15d x 21w	0.95 A
R401-62	12v Dc ---	Ba15d x 48w	4.00 A
R401-63	24v Dc ---	Ba15d x 48w	2.00 A
R401-64	48v Dc ---	Ba15d x 25w	0.60 A
R400-03	24v Ac ~	Ba15d x 48w	2.00 A
R400-02	48v Ac ~	Ba15d x 25w	0.55 A
R400-04	115v Ac ~	E14 x 60w	0.55 A
R400-05	230v Ac ~	E14 x 60w	0.29 A

• Diode Polarised for Fire Alarm Systems



**Kg** 0.98

50 Hz

°C -10+55

**IP** 65

**RPM** 160 $\pm$ 30 Dc

**RPM** 120 Ac

APPROVED AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO THE PRODUCT WHEN ORDERING

01

02

03

04

05

**INDUSTRIAL**