


# Visual Signals STATIC FILAMENT

## BEACONS

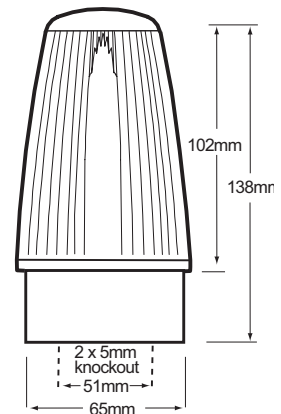

## Industrial Static Filament Beacons > SF125 Series

### Product overview

The SF125 Series is identical to the flashing filament beacons with the exception that they do not operate through an On and Off cycle. When the unit is energised, the light source stays permanently 'On' - often referred to as steady

mode. The main advantage of this type of beacon is that the light can be controlled by a separate source, ie a control panel, giving the unit more flexibility.

These units are supplied with a filament lamp. The light output is increased by the use of a reeded lens. Ideal for local signalling applications.

### Features

Continuously rated

Suitable for surface or wall mounting

Suitable for use with conduit BESA box

Optional wall bracket & protective guard available  
- see accessory page

360° visibility

IP65

### Material

UV Stable Polycarbonate Lens

UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
SF125-80	12v Ac/Dc ~	Ba15d x 21w	1.75 A
SF125-81	24v Ac/Dc ~	Ba15d x 21w	0.88 A
SF125-82	115v Ac ~	Ba15d x 15w	0.13 A
SF125-83	230v Ac ~	Ba15d x 15w	0.07 A



**Kg** 0.17

50/60 **Hz**

°C -25+55

**IP** 65

**INDUSTRIAL**

APPROVED AND  
CONFORMITIES



ADD THE FOLLOWING LENS CODES  
TO THE PRODUCT WHEN ORDERING

01 02 03 04 05