

# Visual Signals STATIC FILAMENT


## BEACONS



SF401/400-05/09



SF401-62/63

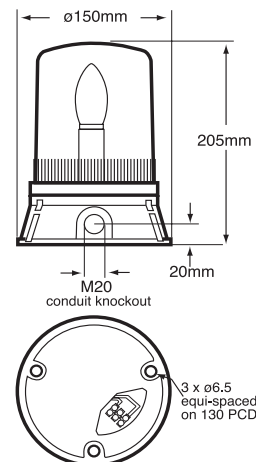

## Industrial Static Filament Beacons > SF401/400 DIN Base Series

### Product overview

The SF401/400 DIN Base Series is identical to the flashing filament beacons with the exception that they do not operate through an On and Off cycle. When the unit is energised, the light source stays permanently 'On' - often referred to as steady mode. The main advantage of this type of beacon is

that the light can be controlled by a separate source, ie a control panel, giving the unit more flexibility.

These units are available with either a filament or tungsten halogen lamp.

The use of a smooth outer lens makes cleaning of the unit easy and less likely to become ineffective due to a build-up of dirt. The DIN Base Series offers the installer the option of a three point fix using external fixing points.

### Features

Continuously rated

Suitable for surface mounting

Cage guard option available  
- see accessory page

360° visibility

IP65

### Material

UV Stable Polycarbonate Lens  
UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
SF401-62	12v Ac/Dc ~	H1 x 55w	4.60 A
SF401-63	24v Ac/Dc ~	H1 x 70w	2.90 A
SF401-05	12v Ac/Dc ~	Ba15s x 48w	4.00 A
SF401-06	24v Ac/Dc ~	Ba15s x 48w	2.00 A
SF401-07	48v Dc ---	Ba15d x 35w	0.65 A
SF400-08	115v Ac ~	E14 x 60w	0.55 A
SF400-09	230v Ac ~	E14 x 60w	0.29 A



Kg 0.71

50/60 Hz

°C -25+55

IP 65

INDUSTRIAL

APPROVED AND  
CONFORMITIES



ADD THE FOLLOWING LENS CODES  
TO THE PRODUCT WHEN ORDERING

01 02 03 04 05