

# TOWER LIGHTS

## SURFACE MOUNT



### STATIC FILAMENT ONLY

Luci Fisse Feux a Lumiere Fixe Dauerleuchten Luces Fijas

Code No:	Voltage:	Light Source:	Current:
TLSF-S-H-12	12v Ac/Dc ~	Ba15s x 10w	0.90 A •
TLSF-S-H-24	12v Ac/Dc ~	Ba15s x 10w	0.45 A •
TLSF-S-H-115	115v Ac ~	Ba15s x 10w	0.10 A •
TLSF-S-H-230	230v Ac ~	Ba15s x 10w	0.05 A •


H Advise either Two Stack '2' or Three Stack '3'  
• Current per module

### FLASHING / STATIC FILAMENT

Luci Lampeggianti Feux Clignotants  
Blinkeuchten Luces Intermitentes

Code No:	Voltage:	Light Source:	Current:
TLFF-S-H-12	12v Ac/Dc ~	Ba15s x 10w	0.90 A •
TLFF-S-H-24	24v Ac/Dc ~	Ba15s x 10w	0.45 A •
TLFF-S-H-115	115v Ac ~	Ba15s x 10w	0.10 A •
TLFF-S-H-230	230v Ac ~	Ba15s x 10w	0.05 A •

H Advise either Two Stack '2' or Three Stack '3'  
• Current per module

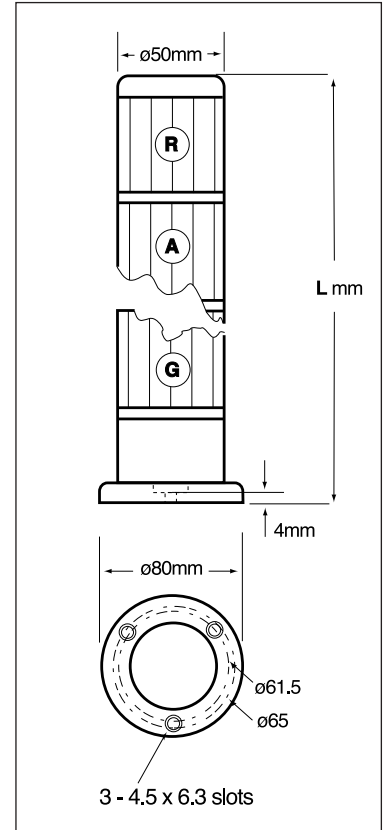


#### Standard Stacks

Stack	Colour	'L'
2	Red / Amber	178mm
3	Red/Amber/Green	243mm


Connections by flying leads 400mm long

### TWO STACK THREE STACK OPTION

°C -25+66	IP 54	50/60 Hz	Kg 0.25 2-Stack 0.33 3-Stack
-----------	-------	----------	---------------------------------

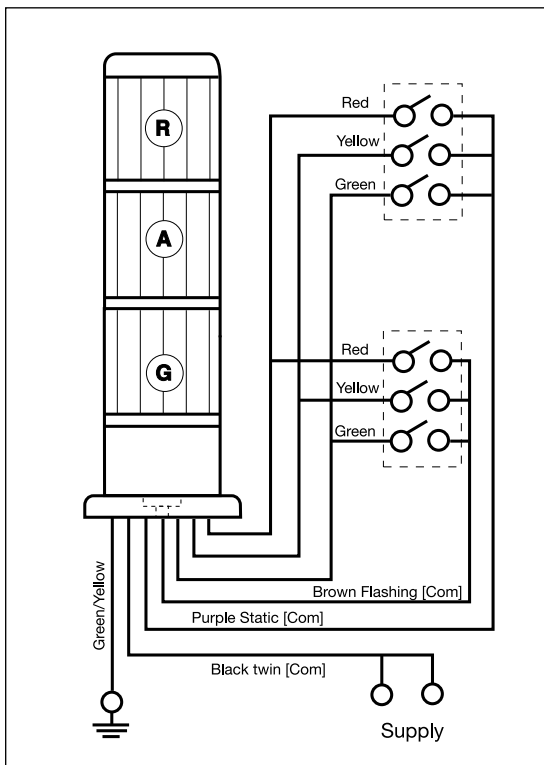

Wiring Diagram : Static and Flashing

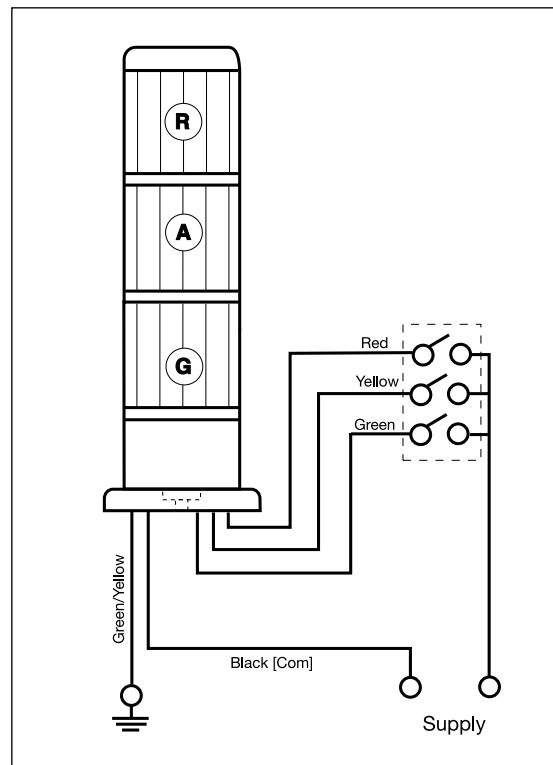

Wiring Diagram : Static only