


Visual Signals XENON

BEACONS



X125 Series

ES Version

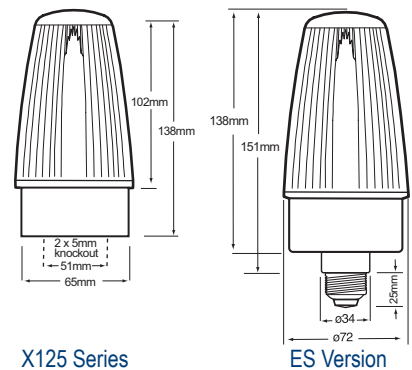

X125 Series

ES Version

Industrial Xenon Beacons > X125 Series

Product overview

The X125 Series utilises a discharge capacitor and converter circuit to ignite xenon gas inside a tube, resulting in a brilliant flash of light. Xenon gas ignites virtually instantaneously so maximum brightness is obtained immediately.

Xenons have an added advantage of low current consumption combined with a reasonable life span. The design of the X125 Series ensures a 360 degree light output. A screw base version is also available, see the ES version which is ideal for easy or temporary installation due to the ES27 screw base. Xenon beacons are one of the most efficient, effective and brightest visual signals available.

Features

- Continuously rated
- Suitable for use with conduit BESA box - X125 only
- Suitable for surface or wall mounting
- Optional wall bracket & protective guard available - X125 only - see accessory page
- 360° visibility
- IP65

Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
X125-Ac/Dc	10-100v Dc --- 20-72v Ac ~	Xenon 2.0 J	130 mA •
X125-55	115v Ac ~	Xenon 2.3 J	30 mA
X125-56	230v Ac ~	Xenon 2.7 J	21 mA
ES Version			
X125ES-51	115v Ac ~	Xenon 2.3 J	30 mA
X125ES-52	230v Ac ~	Xenon 2.7 J	21 mA

• At 24v Dc ---



Kg 0.17 X125
0.20 X125ES

50/60 Hz

°C -25+55

IP 65

FPM 60

INDUSTRIAL

APPROVED AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO THE PRODUCT WHEN ORDERING

01 02 03 04 05