


Visual Signals XENON

BEACONS

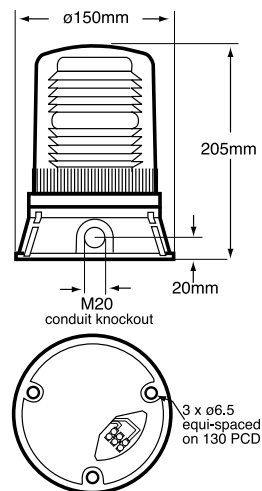

Xenon Beacons > X501-500 Series

Product overview

The X501/500 Extra High Output Series utilises a discharge capacitor and converter circuit to ignite xenon gas inside a tube, resulting in a brilliant flash of light. Xenon gas ignites virtually instantaneously so maximum brightness is obtained immediately. Xenons have an added advantage of low current consumption combined with a reasonable life span. The X501/500 Series provides a 360-degree light output and has a Single Flash or Double Flash option. The Double

Flash option extends the signal duration making it more noticeable to the human eye. The Extra High Output capability of this series makes it suitable for the more demanding of visual applications. Brightness is increased by the use of a Dioptic (Fresnel) lens which magnifies the light output. This series also incorporates both bottom and side entry cabling access and mounting is achieved via external three point fixing. Xenon beacons are one of the most efficient, effective and brightest visual signals available.

Features

- Extra high output
- Continuously rated
- Suitable for surface or wall mounting
- Optional wall bracket & protective guard available - see accessory page
- 360° visibility
- Double flash option
- M20 side or bottom cable entry
- Suitable for local signalling applications
- IP65

Material

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base



| Code No: | Voltage: | Light Source: | Current: |
|----------------------|---------------|---------------|-------------|
| X501-18 [•] | 12/24v Dc --- | Xenon 24J/18J | 2.30/1.30 A |
| X500-21 | 115v Ac ~ | Xenon 24J/18J | 0.65 A |
| X500-22 | 230v Ac ~ | Xenon 24J/18J | 0.40 A |

[•]Pre-set at 24v Dc ---

Kg 1.25

50/60 Hz

°C -25+35

IP 65

FPM 60x90

APPROVAL AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO THE PRODUCT CODE WHEN ORDERING

01

02