


Visual Signals FLASHING FILAMENT

BEACONS

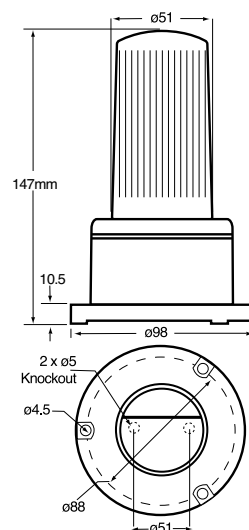

Industrial Flashing Filament Beacons > FF125 DIN Base Series

Product overview

The FF125 DIN Base series operates through an internal circuit which simply cycles the lamp On and Off. These type of beacons generally give a much lower light output as it

takes longer for the lamp to fully illuminate itself. These units are available with a filament lamp. In terms of light coverage, this type of beacon is more efficient as it illuminates the whole surface of the beacon constantly through 360 degrees.

FEATURES

- Easy to clean external lens
- Continuously rated
- Suitable for surface mounting
- Optional protective guard available - see accessory page
- 360° visibility
- Three-point fix external
- IP65

MATERIAL

- UV Stable Polycarbonate Lens
- UV Stable ABS Plastic Base

Code No:	Voltage:	Light Source:	Current:
FF125-90	12v Dc ---	Ba15d x 21w	1.75 A
FF125-91	24v Dc ---	Ba15d x 21w	0.88 A
FF125-92	115v Ac ~	Ba15d x 15w	0.13 A
FF125-93	230v Ac ~	Ba15d x 15w	0.07 A



Kg 0.25

50/60 Hz

°C -25+66

IP 65

FPM 60

INDUSTRIAL

APPROVAL AND CONFORMITIES

